
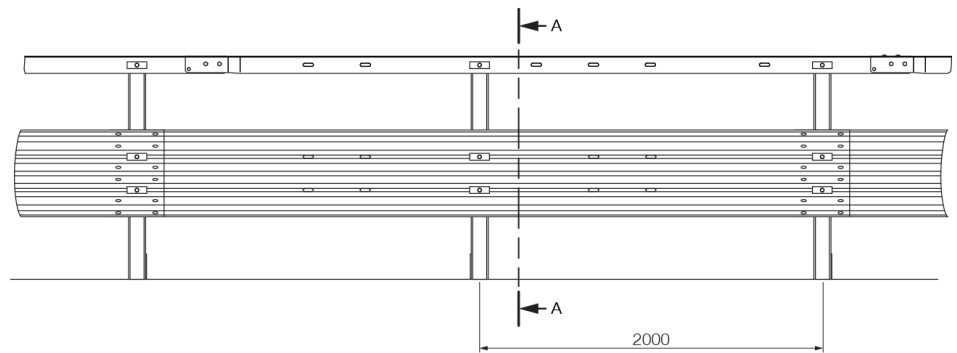


H4b | W4 | A | VI6

SafeStar  441d

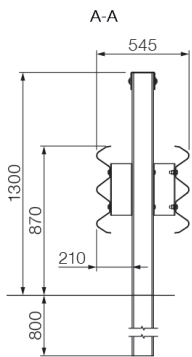

TECHNICAL SPECIFICATIONS

Working width (m)  
1,30

Dyn. deflection (m)  
1,10

Vehicle intrusion (m)  
2,00

Construction width (m)  
0,55

Construction height (m)  
1,30

Post distance (m)  
2,00

Application area  
driven in ground

Type  
Double

Test length (m)  
54,00